

Fleischhaken Standardprogramm

Slaughtering hooks – standard range

bis 300 kg Traglast (Zerlegung) | up to 300 kg



Hook-type rim

2 or 3 rings Ø 220, 320 or 420 mm

Upper part: flat steel 35 x 12 mm, galv.

Sub-part: made of stainless steel, tube Ø 25 mm, rings indented


	L1	L2	W1			Art.-Nr.
2	1.400 mm	200 mm	420/420 mm	250 kg	5,40 kg	5004 4000
3	1.400 mm	200 mm	420/420/420 mm	250 kg	7,50 kg	5004 4010
3	1.400 mm	200 mm	420/320/220 mm	250 kg	7,00 kg	5004 5000

Hakenkranz

2 oder 3 Etagen, Ø 220, 320 oder 420 mm

Oberteil: Flachstahl 35 x 12 mm, verzinkt

Unterteil: NIROSTA Rohr Ø 25 mm, Ringe gekerbt

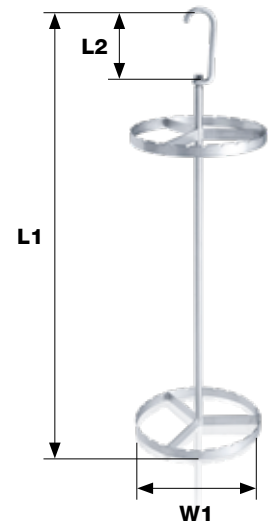

Hook-type rim

Upper part: flat steel 35 x 12 mm, galv.


Sub-part: made of stainless steel, tube Ø 25 mm, 3 rings Ø 220, 320 or 420 mm, 25 hooks Ø 10 mm

L1	L2	W1			Art.-Nr.
1.420 mm	200 mm	220/320/420 mm	250 kg	7,70 kg	5003 8700

Hakenkranz

Oberteil: Flachstahl 35 x 12 mm, verzinkt

Unterteil: NIROSTA Rohr Ø 25 mm, 3 Etagen, Ø 220, 320 oder 420 mm, 25 aufgeschweißte Haken Ø 10 mm

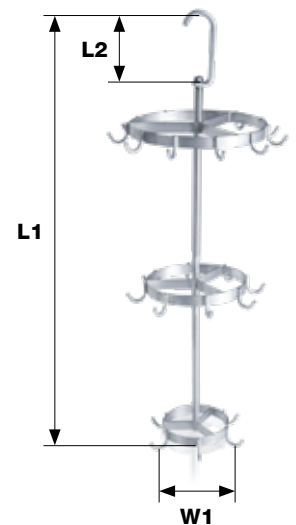

Hanger for cattle heads

Upper part:

A) flat steel 35 x 12 mm, galv.

B) flat steel 40 x 15 mm, galv.

Sub-part: stainless steel solid material Ø 16 mm, 3 x 5 hooks Ø 16 mm, Ø 485 mm full length

	L1	L2	L3			Art.-Nr.
A	1.520 mm	200 mm	570 mm	300 kg	9,00 kg	5503 7010
B	1.520 mm	200 mm	570 mm	300 kg	8,85 kg	5503 7011

Rinderkopfstange

Oberteil:

A) Flachstahl 35 x 12 mm, verzinkt

B) Flachstahl 40 x 15 mm, verzinkt

Unterteil: NIROSTA Vollmaterial Ø 16 mm, 3 x 5 Spitzen Ø 16 mm, Etage Ø 485 mm

