




Fleischhaken Standardprogramm

Slaughtering hooks – standard range

bis 350 kg Traglast | up to 350 kg

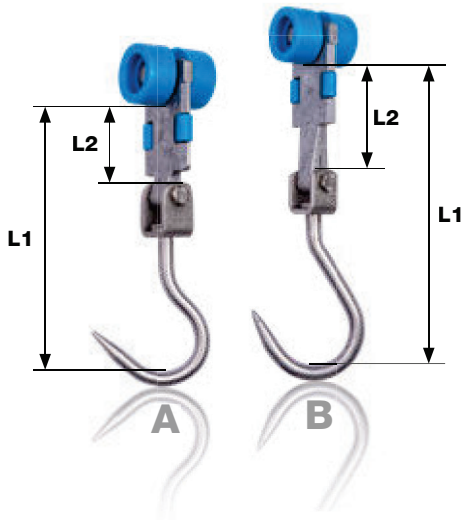

Birail-Haken

Oberteil: Aluminium Druckguss, Laufrollen aus glasfaserverstärktem POM mit Kugellagern 6201 2RS


Unterteil:
A) Edelstahl Ø 16 mm
B) Edelstahl Ø 18 mm

Birail hook

Upper part: aluminium die casting, roller made of glass fiber reinforced POM with ball bearings 6201 2RS

Sub-part:
A) stainless steel Ø 16 mm
B) stainless steel Ø 18 mm

	L1	L2			Art.-Nr.
A	265 mm	120 mm	250 kg	1,38 kg	9200 0510
A	305 mm	160 mm	250 kg	1,40 kg	9200 0511
B	270 mm	120 mm	400 kg	1,58 kg	9200 0512
B	310 mm	160 mm	400 kg	1,60 kg	9200 0513

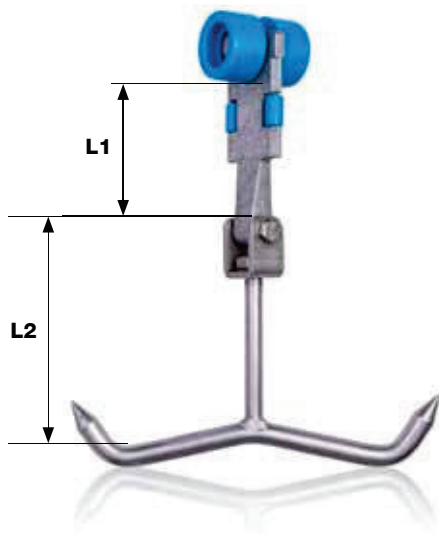

Birail-Haken, lange Ausführung

Oberteil: Aluminium Druckguss, Laufrollen aus glasfaserverstärktem POM mit Kugellagern 6201 2RS

Unterteil: Edelstahl Ø 16 mm

Birail hook long

Upper part: aluminium die casting, roller made of glass fiber reinforced POM with ball bearings 6201 2RS

Sub-part: stainless steel Ø 16 mm

L1	L2	W1			Art.-Nr.
330 mm	160 mm	240 mm	250 kg	2,04 kg	9200 0519