

Perfect Counter

The perfect hook counter from Marchel

Exact quantity detection of slaughter hooks of all kinds

Convenient, intuitive operation and comprehensive features to meet all customer requirements – quite simply perfect.



Sophisticated technology ✓

Convenient operation ✓

Efficient ✓



How it works

Upon turning on the main switch, the **Perfect Counter** is ready for operation and can stay in this setting permanently.

Counting starts as soon as a hook passes the detection sensor.

The process-related data (customer, vehicle number plate, consignment, etc.) can be entered conveniently before, during or after completion of the count. The process is completed by pressing the button 'Save Data' or 'Save and Print Data'.


All data is saved to a USB stick.

Data transmission to a control room is possible.

The counter is available with or without a ticket printer.

Adbantages you can profit of!

- 1. Reliable counting also with packages of hooks without gaps**
- 2. Comfortable and simply use**
- 3. Transportation, storage, pick up on different places and tendering on slaughter house or truck docking stations.**
- 4. High capacity**
- 5. Favouerable price-performance ratio**
- 6. Compact construction**
- 7. Use for eurohooks, cattlehooks or spreading hooks possible**
- 8. Less maintenance expenses**
- 9. Pare down of costs**
- 10. No problem to connect to other transport systems**
- 11. Quick installation**
- 12. User responsive**

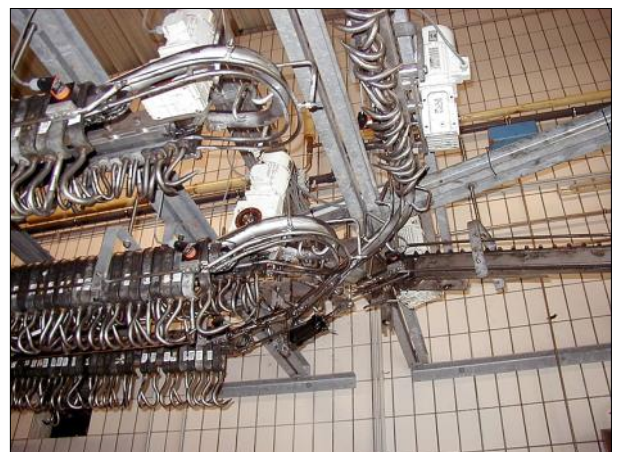

Features

- Operation via convenient touch panel (SIEMENS TP700)
- Optimum menu navigation
- Stainless steel housing, IP 66 (if equipped with ticket printer with double door and sight glass)
- Easy, customised entry of process-related data
- Connection to a control room possible (optional)
- Easy-to-attach, special sensor holder, with which even hook assemblies without gaps can be reliably counted
- Excellent legibility, even in poor lighting conditions

Special features


Connection to a control room




Thermal printer

Special solutions for empty hook conveying

- Hook checking, including automatic ejection of faulty hooks
- Hook turning devices for Eurohooks and spreader hooks

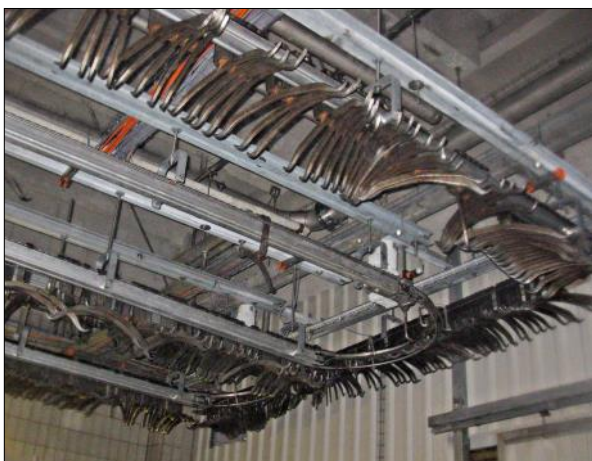

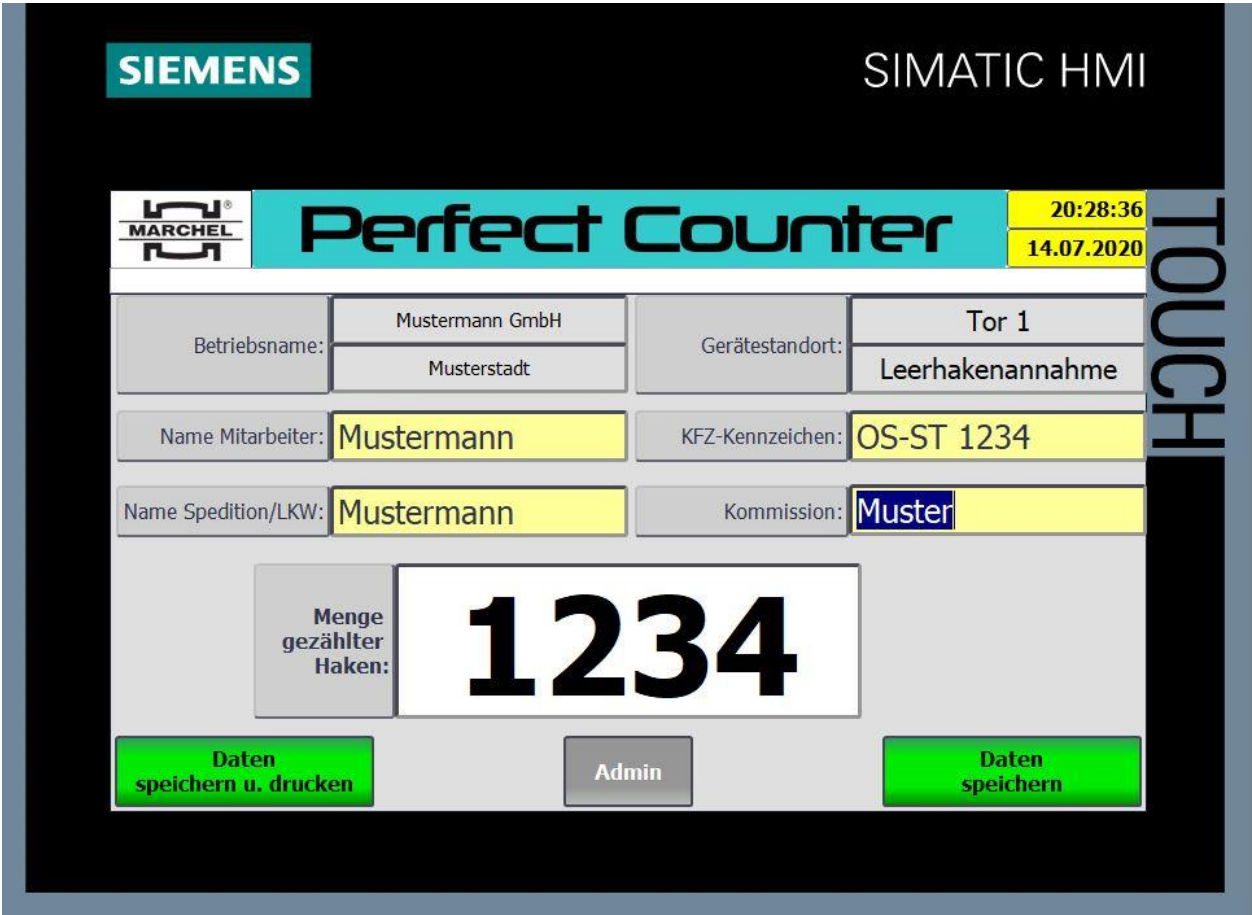

Technical data		Design with Ticket printer
Article number	9200 0400	9200 0401
Power supply	230 V AC/50 Hz	230 V AC/50 Hz
Connected load	0,20 kW	0,20 kW
Dimensions:		
Height	450 mm	450 mm
Width	300 mm	450 mm
Depth	210 mm	300 mm
Protection level	IP 66	IP 66

**Heinz Marchel
GmbH & Co. KG**
Ringstraße 3
49134 Wallenhorst
GERMANY

Phone: +49 (0) 5407/8989-0
www.marchel.de
Email: info@marchel.de